
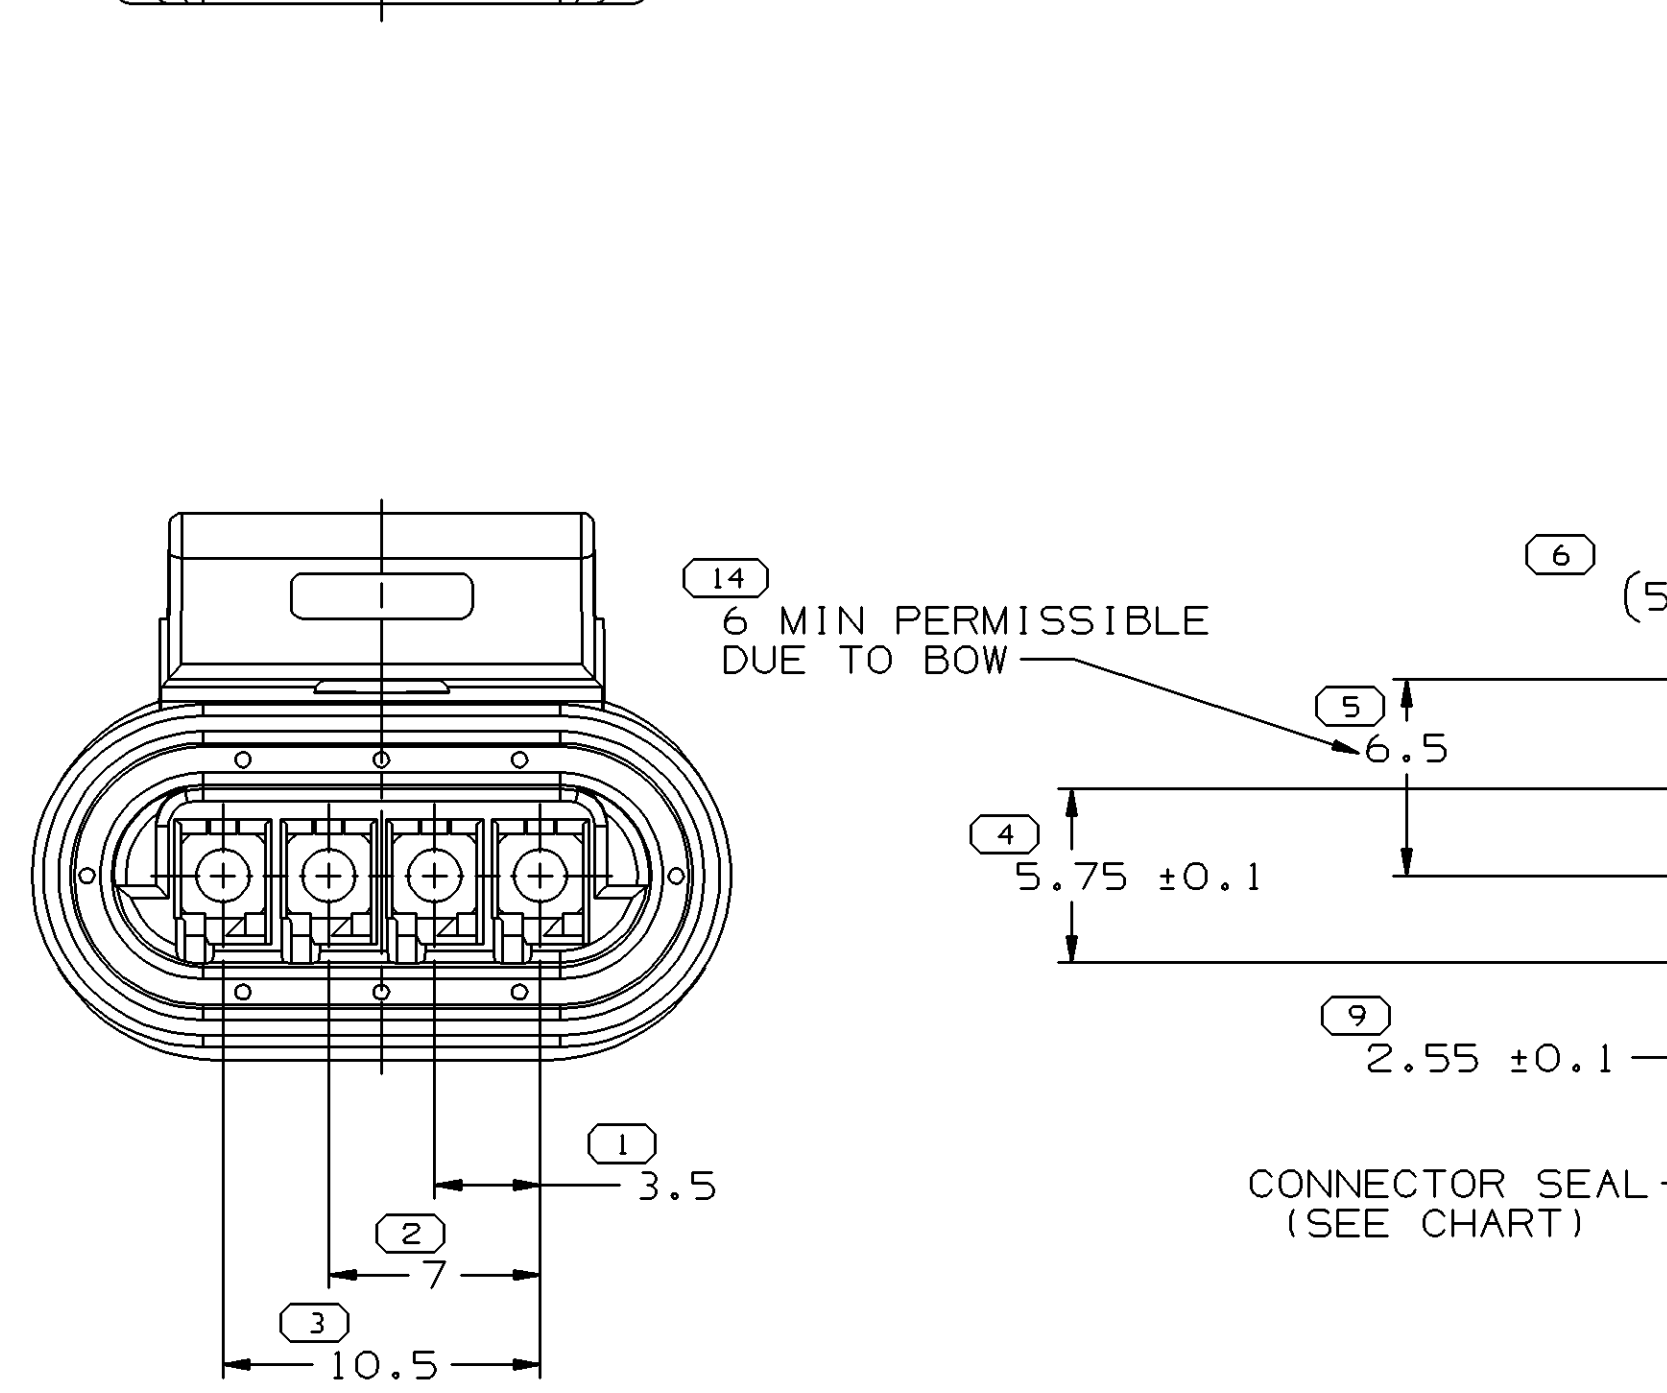
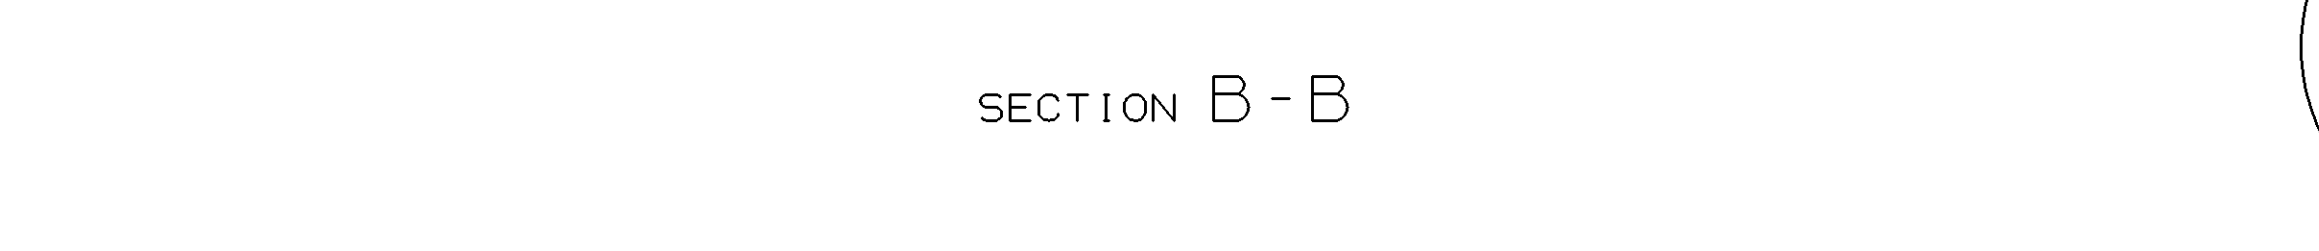
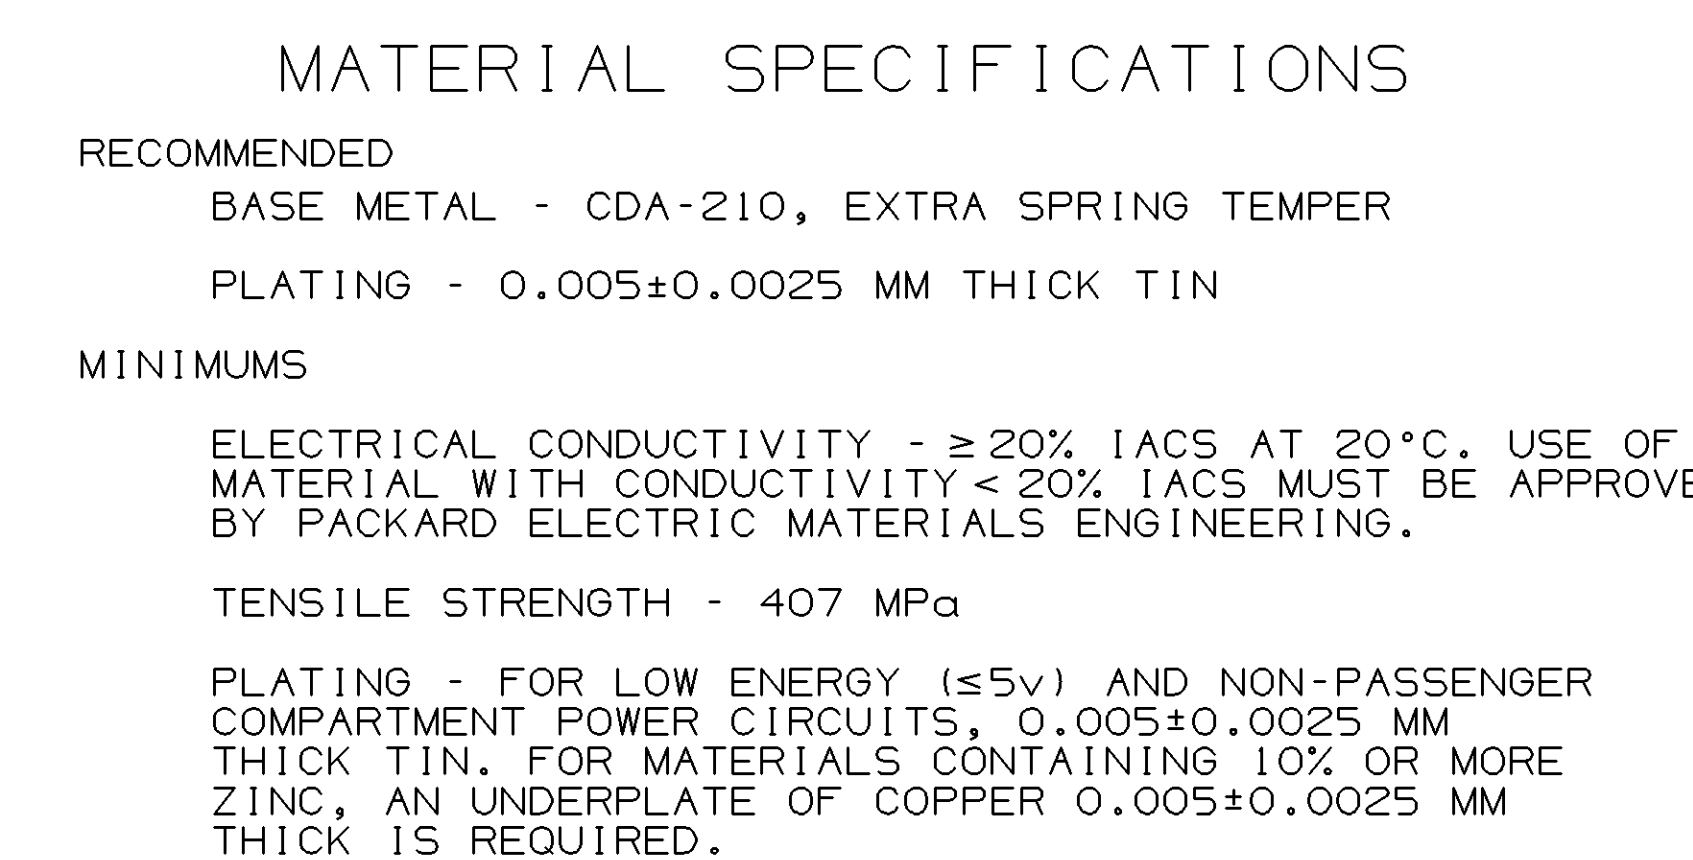


- NOTES:
1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION.
(SEE MATH MODEL FOR PRECISE DIMENSIONS)
FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR
TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
 2. WHEN PARTS ARE SHIPPED, THEY MUST BE PACKED IN PLASTIC
BAGS OR SHIPPING CONTAINERS MUST BE LINED WITH PLASTIC
LINERS. BAGS OR LINERS MUST BE SEALED TO AVOID ENTRY
OF FOREIGN MATTER
 3. MATING COMPONENTS:
TERMINAL 12124075 OR EQUIVALENT
 4. FOR LEAD LENGTH CALCULATIONS, DISTANCE FROM MATING END
OF CONNECTOR TO FRONT OF CABLE CORE IS 10.15/7.05
 5. SEALING CODE 3

DESIGN WILL PASS SALT FOG AND IMMERSION TEST
AFTER CONDITIONING AS SPECIFIED IN ESA-664
(WEATHER-PACK, ESA-710 (METRI-PACK), ESA-650
(UNDERHOOD MICRO-PACK), C-4006 (WORLD CONNECTOR)
ETC. - WHEN MATED TO MATING PART OR EQUIVALENT
 6. FOR PARTS NUMBERS WITH ADHESIVE, USE PM003510
OR ADHESIVE APPROVED BY MATERIALS ENGINEERING TO
ATTACH CONNECTOR SEAL TO CONNECTOR



1	11/25	4.1	10/2	10/1	R 07	-
2						