

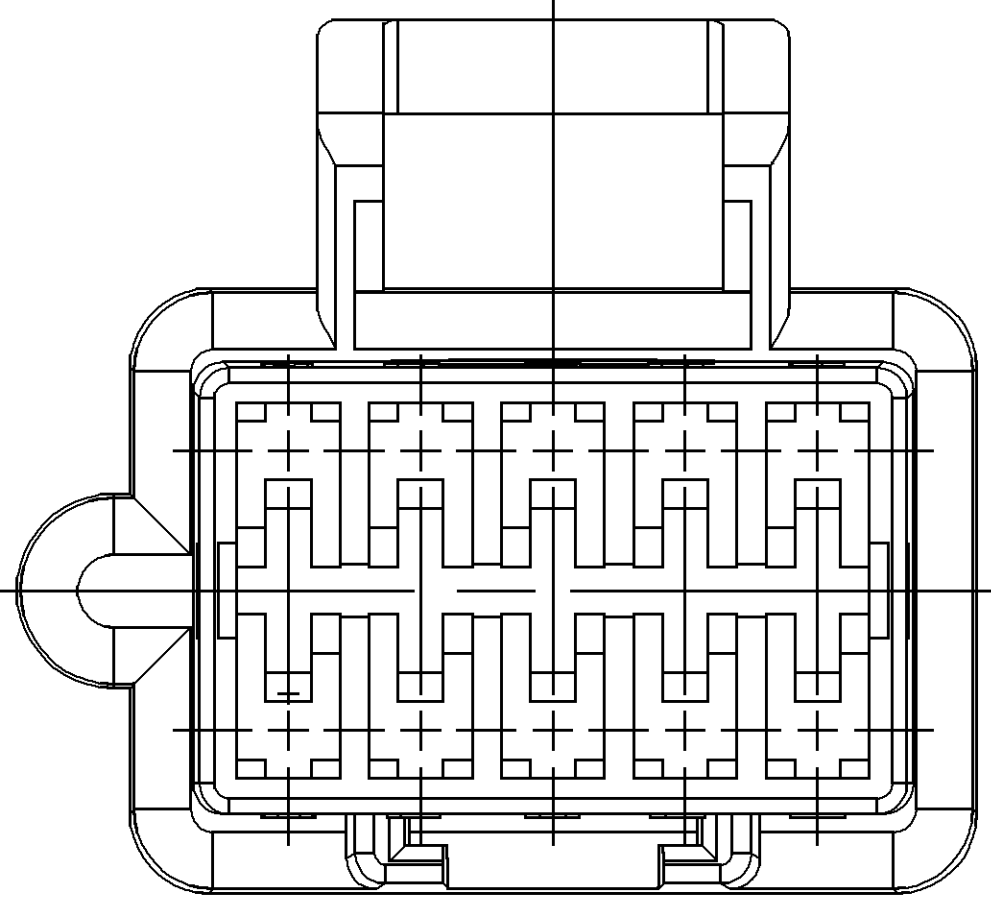
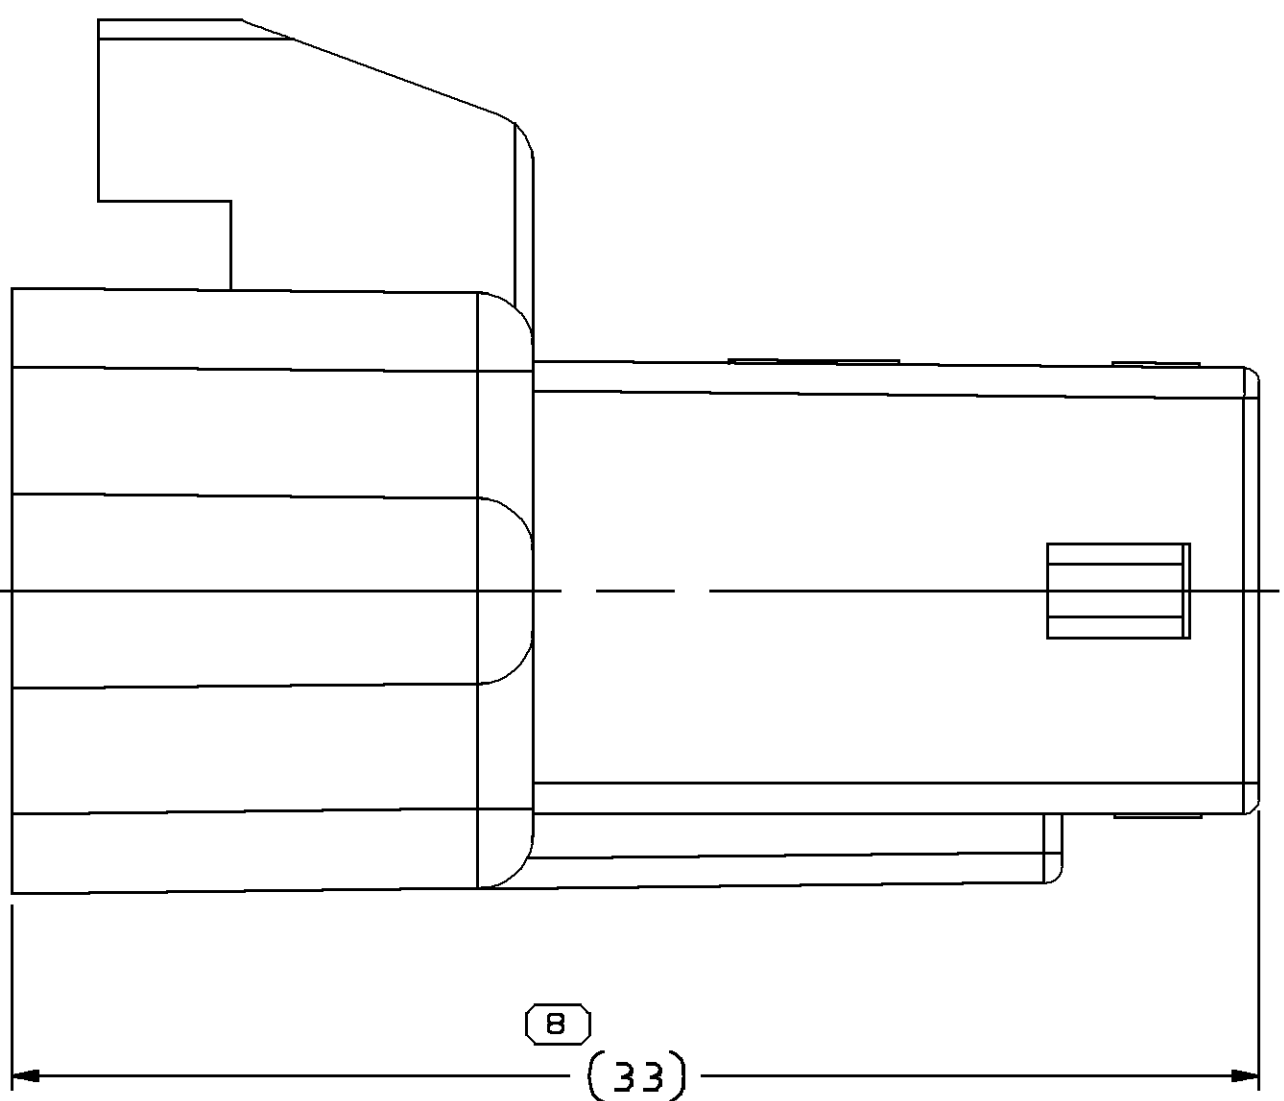
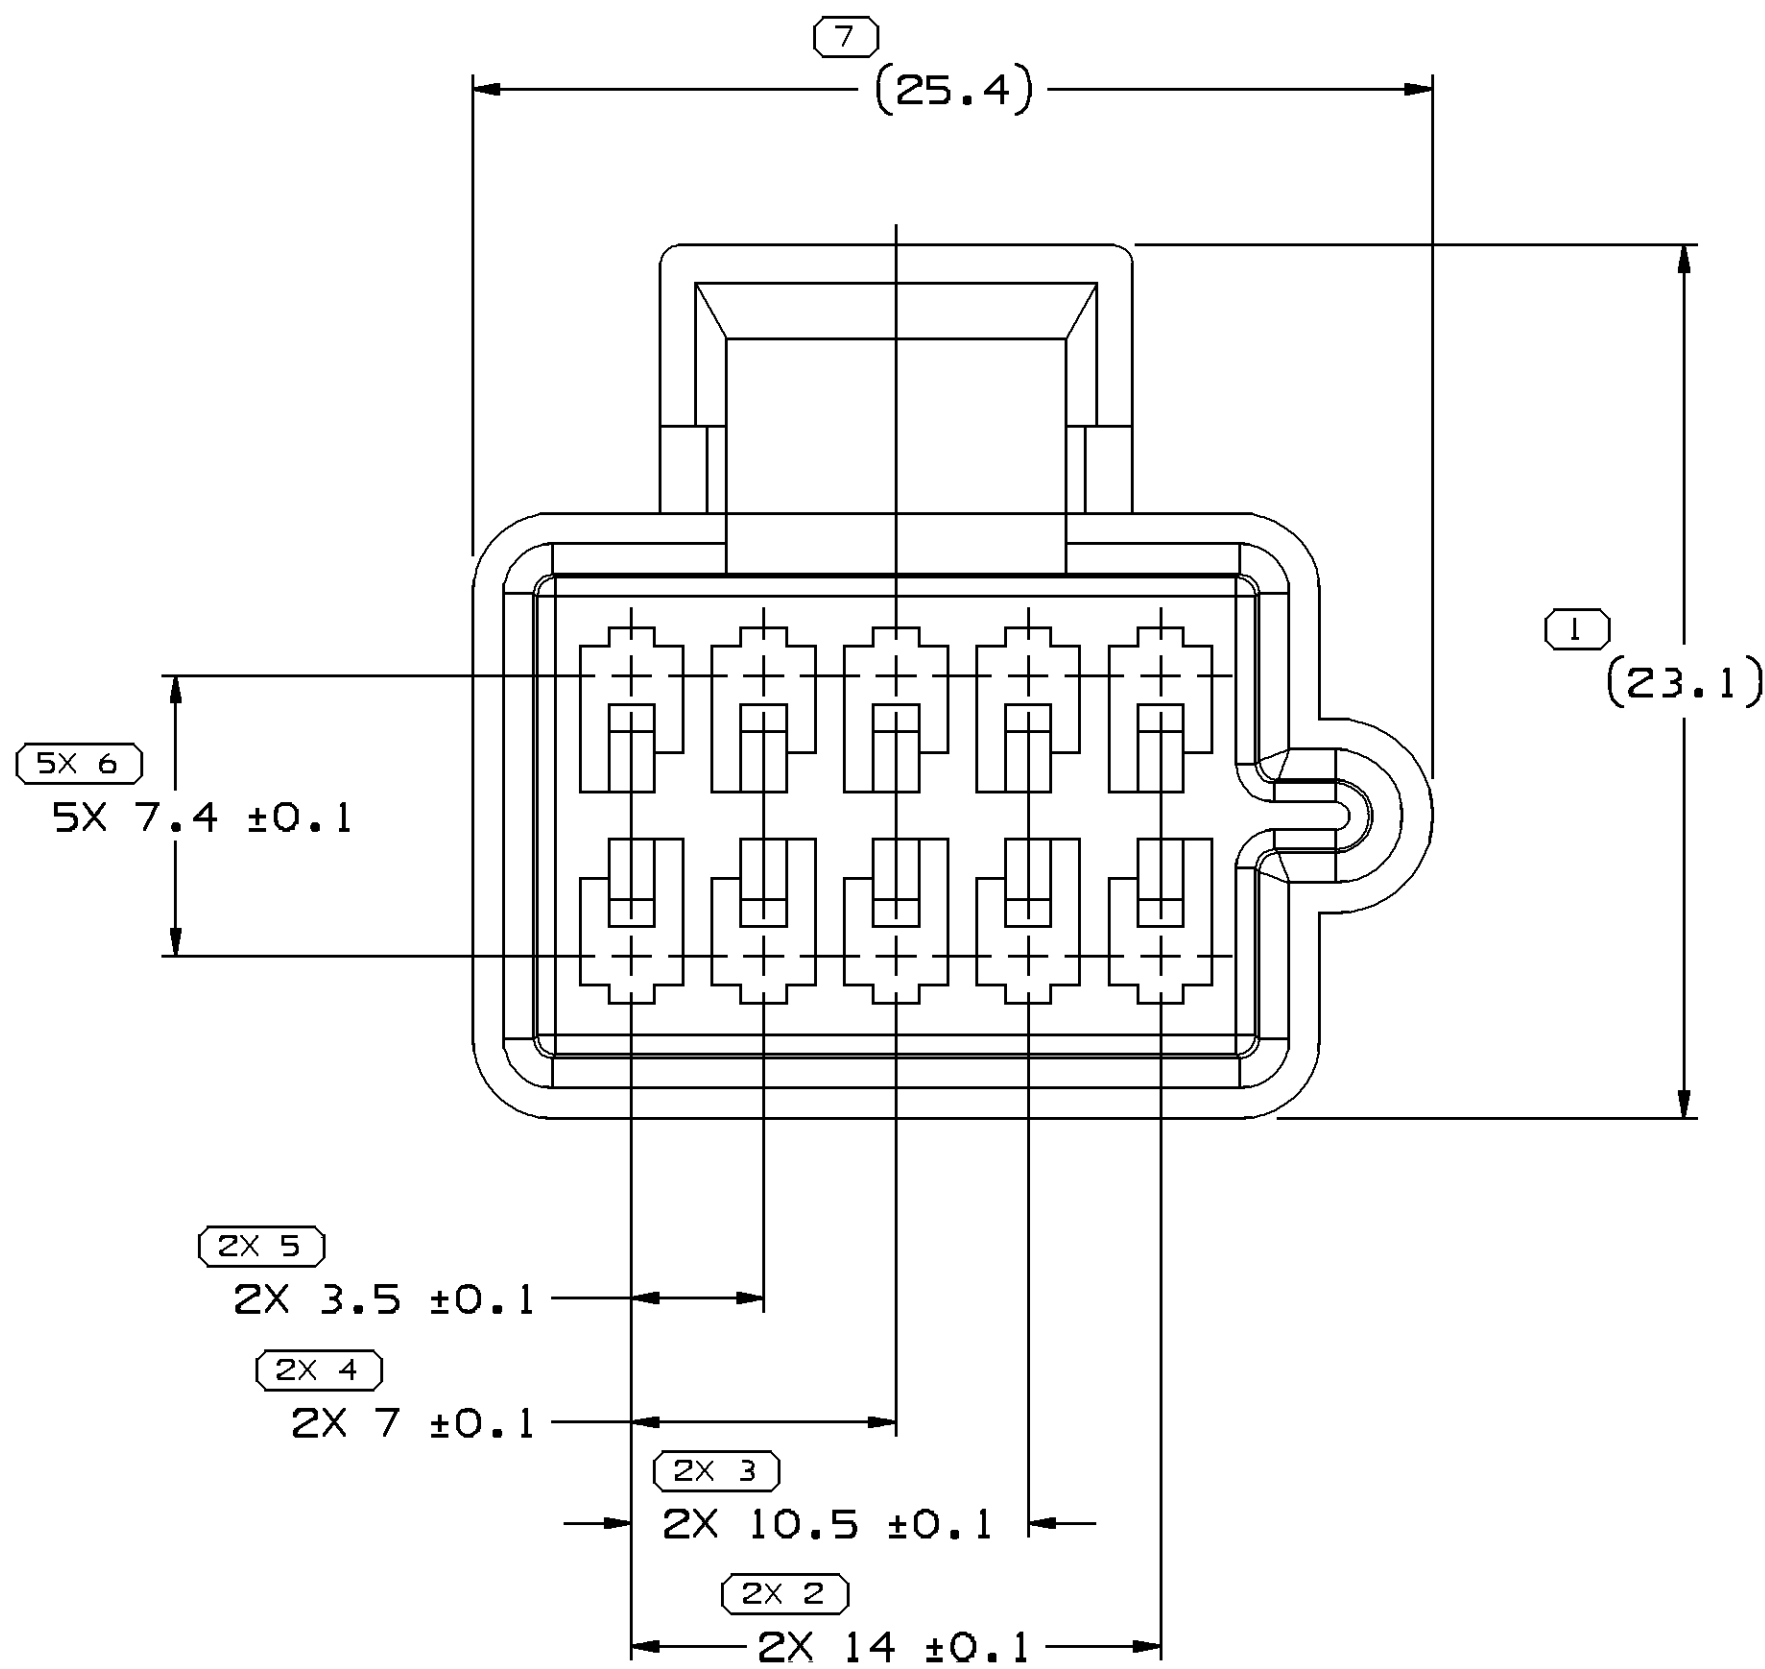


SYMBOL DEFINITION		MISSING SYMBOLS	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ○ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.		NO MISSING SYMBOL NUMBER	
TOTAL NO OF INSPECTIONS REQUIRED		16	
LAST NO. USED		8	

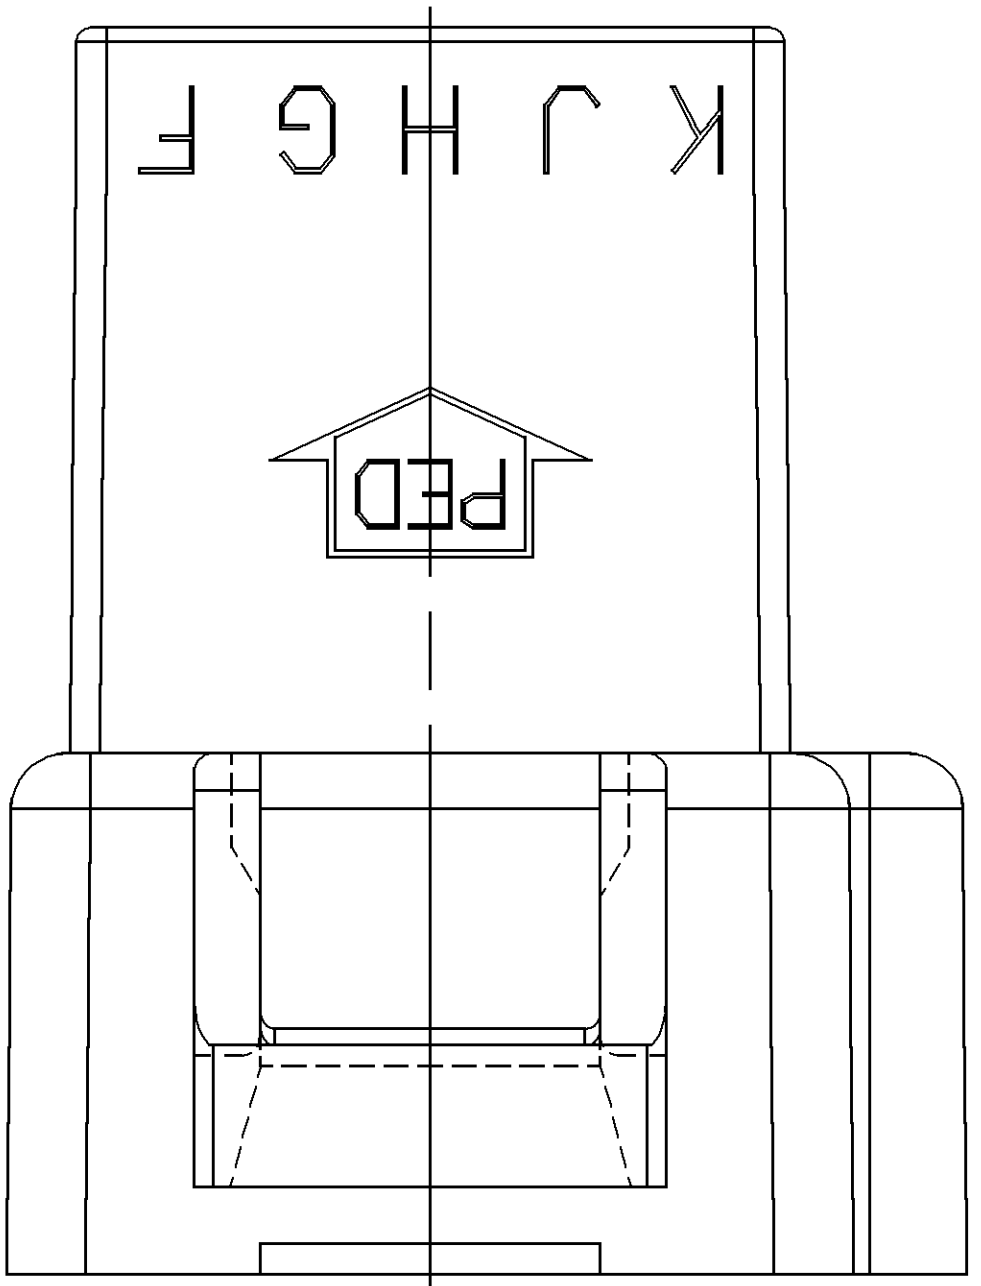

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION
(SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL
OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- THIS CONNECTOR WILL PASS THROUGH A Ø 31 MIN HOLE.
- REFERENCE MATING COMPONENTS OR EQUIVALENT:
CONNECTOR 12064769
- THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT:
CAVITIES TO ACCEPT 12040993 TERMINAL OR EQUIVALENT.
MAX INSULATION CRIMP MUST BE LESS
THAN 3 HIGH AND 2.6 WIDE.
SECONDARY TERMINAL LOCK 12064772
- MATERIAL RECYCLING CODE PER ISO 11469. (2.3)X(0.1) RAISED
CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE.
OPTIONAL CONSTRUCTION TO BE NO MATERIAL RECYCLING CODE.
- (2.3)X(0.1) DELPHI CORPORATE BRAND TO BE LOCATED ON ANY
EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY.
OPTIONAL CONSTRUCTION FOR EXISTING TOOLING MAY BE "PED".

15324758	001			R0071754 PA66 HS IM-BLK	4.142
15324056	A			R0071790 PA66 HS IM-BLU	4.142
12064770	03			M3592024 PA66 HS IM CRM	4.142
PART NO	REV	N/P	STATUS	MATERIAL SPECIFICATION AND COLOR	VOL CM³

DIMENSIONAL RANGE (MM)		CHART E1							
FROM	> 0	> 20	> 30	> 70	> 100	> 150	> 200	> 250	> 300
	20	30	40	100	150	200	250	300	400
TOLERANCE UNLESS OTHERWISE SPECIFIED									
	±0,15	±0,2	±0,3	±0,4	±0,5	±0,6	±0,8	±1	±1,2
ANGULAR TOLERANCE ±2°									