
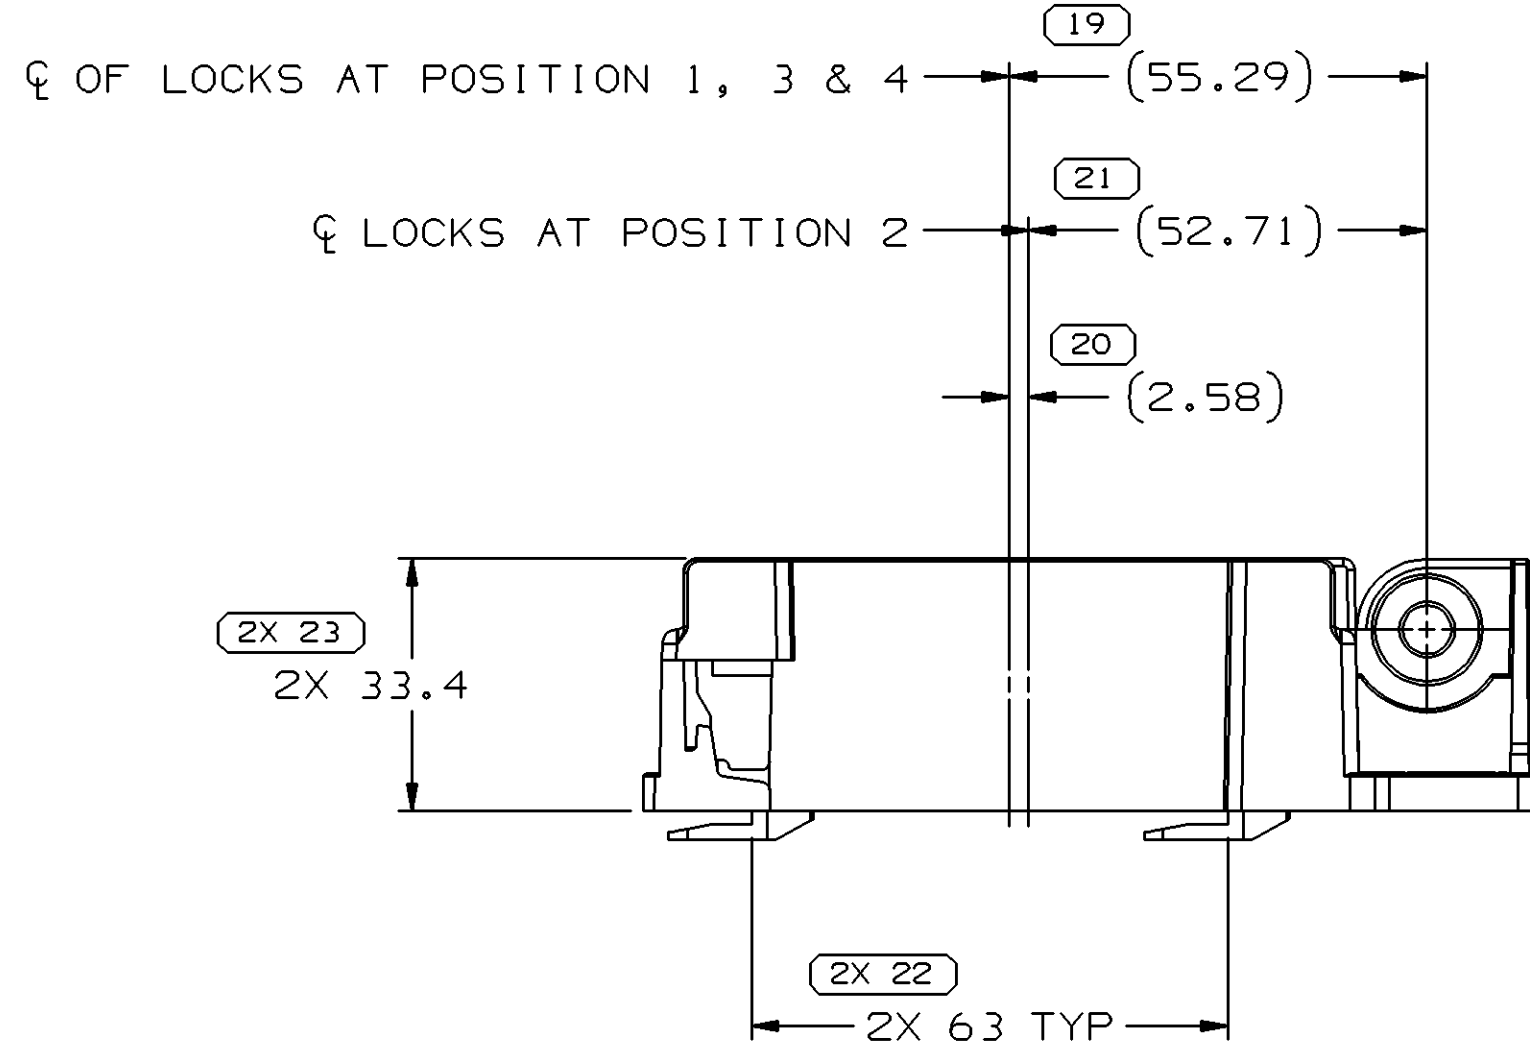
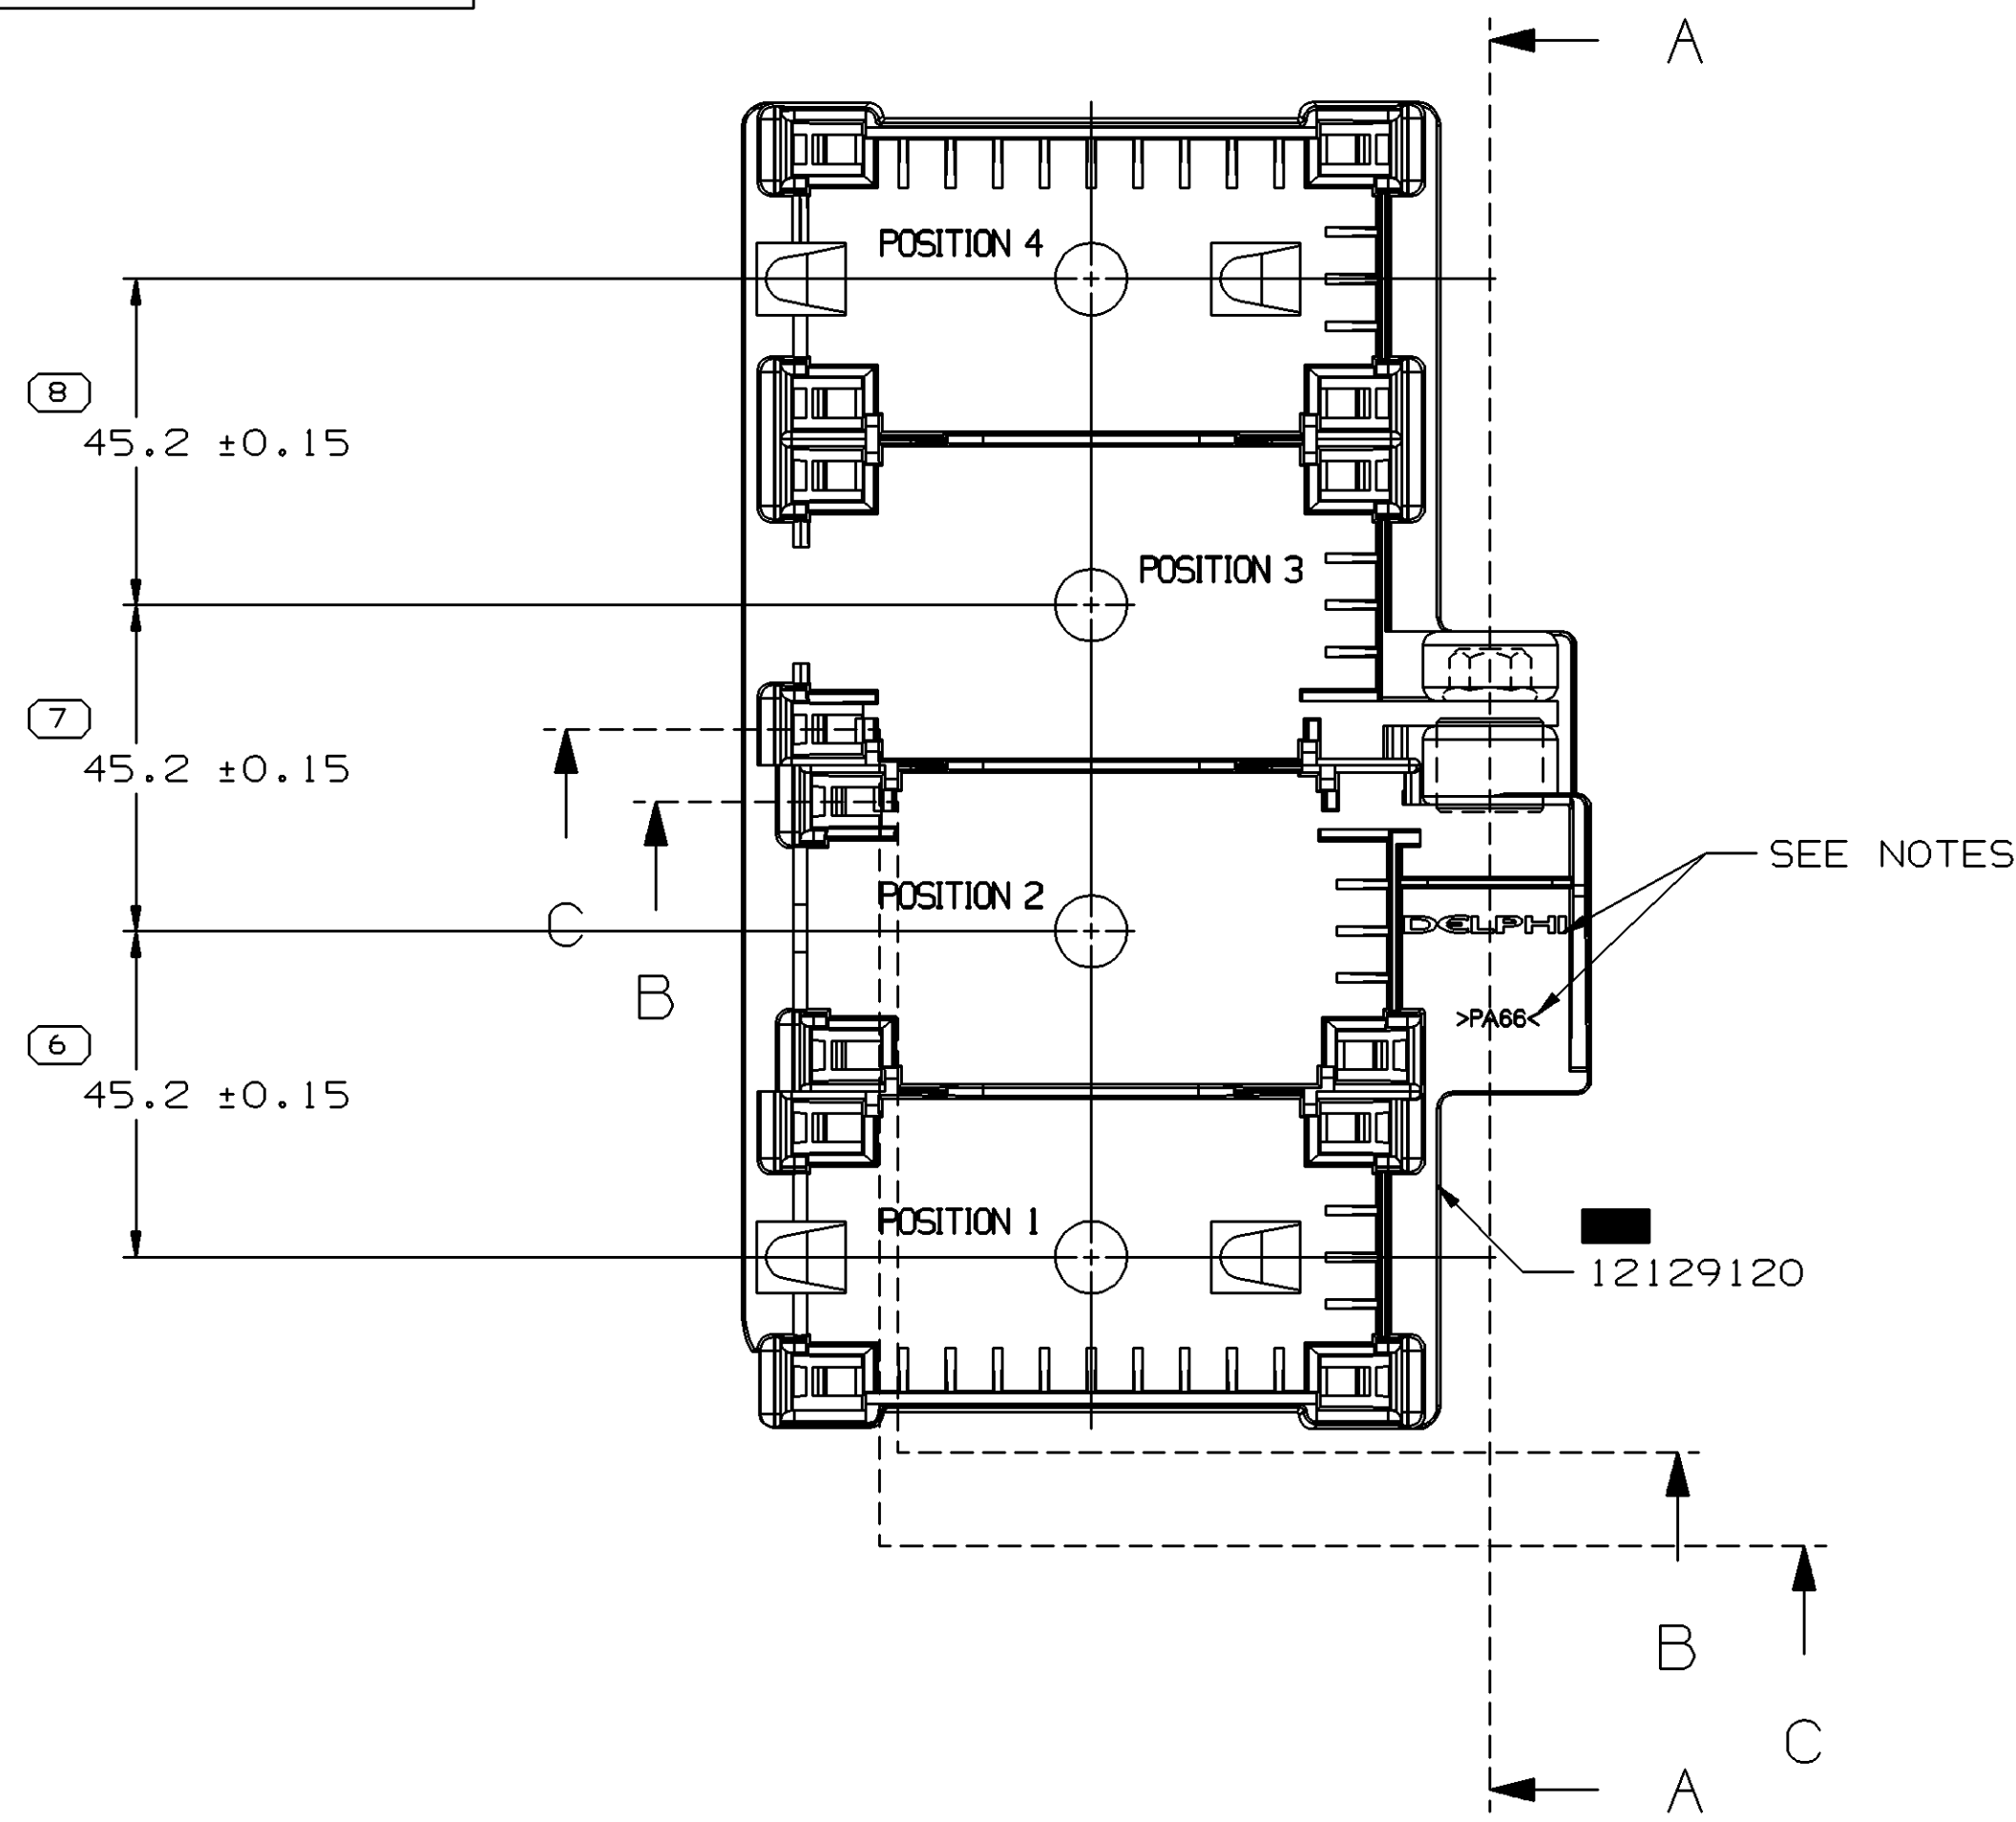
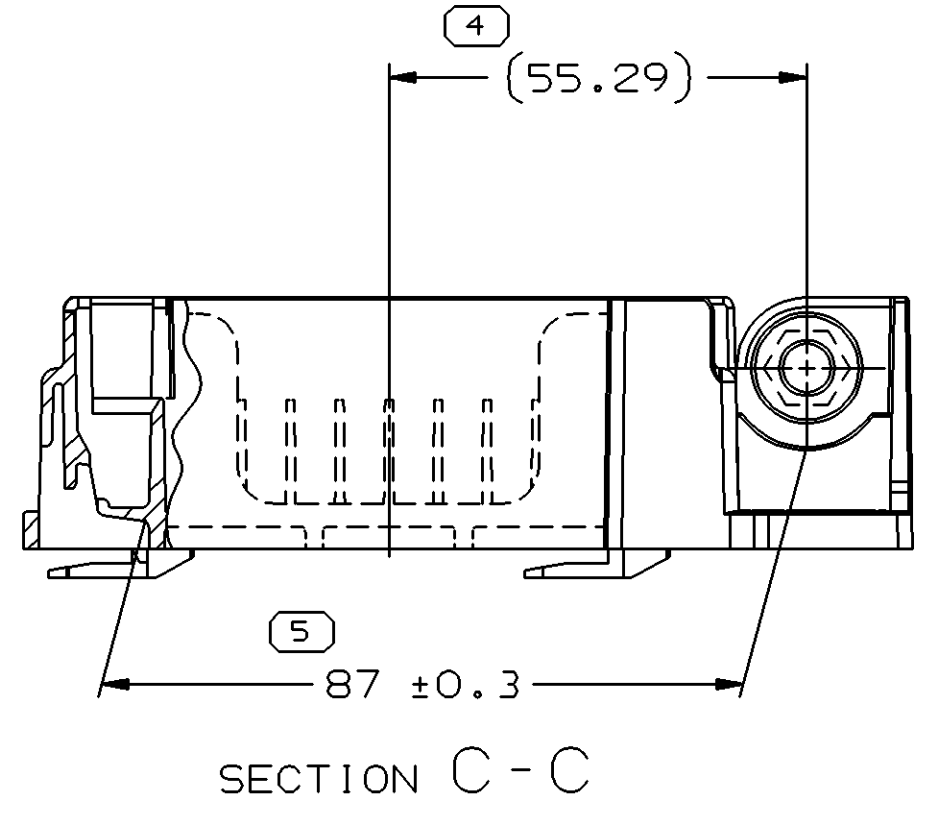
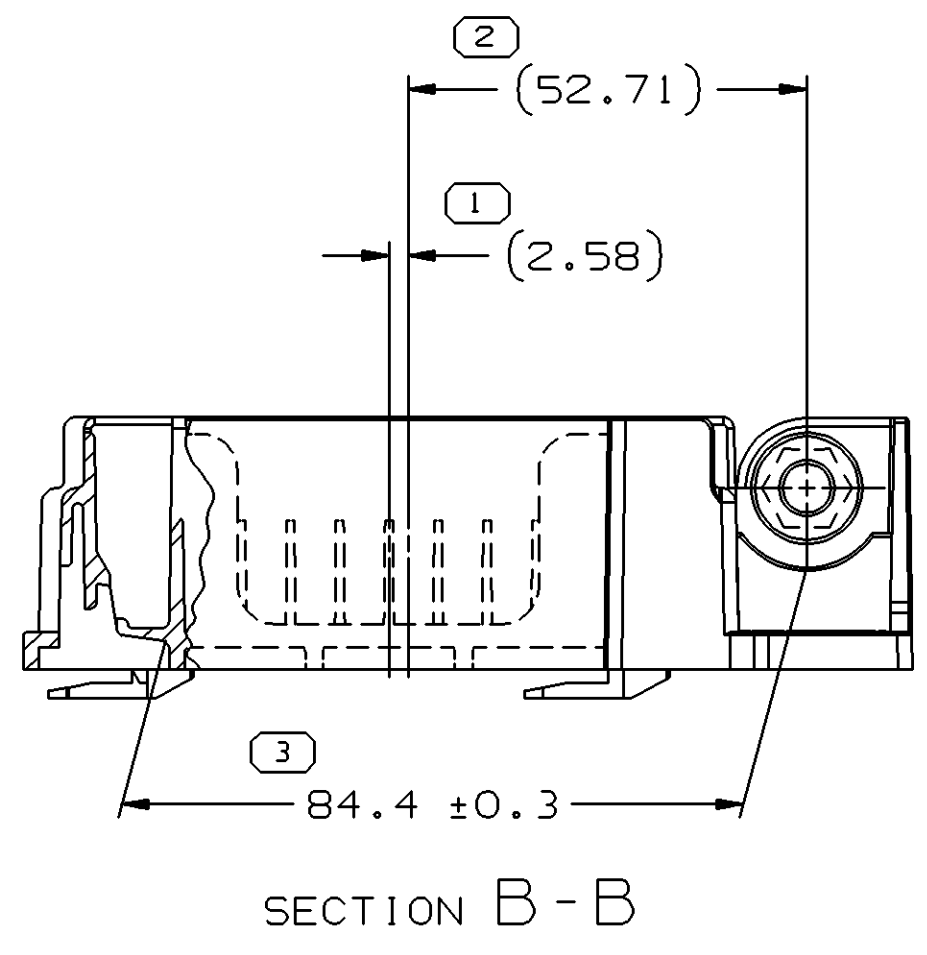
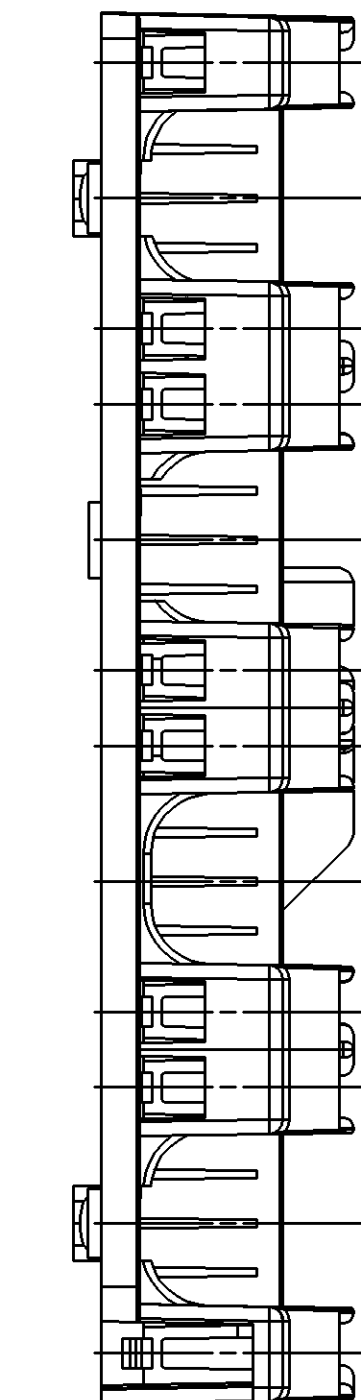
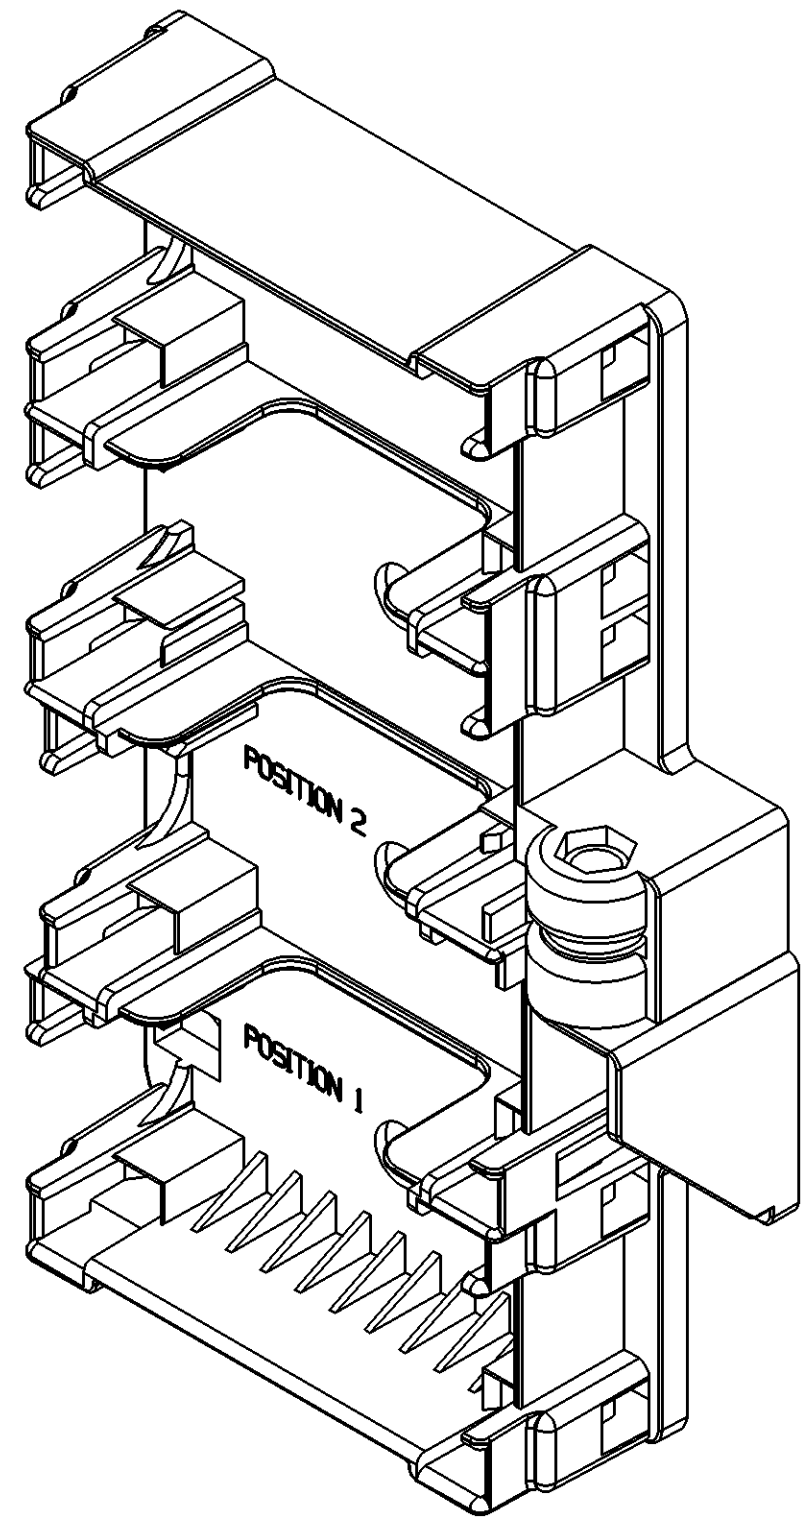
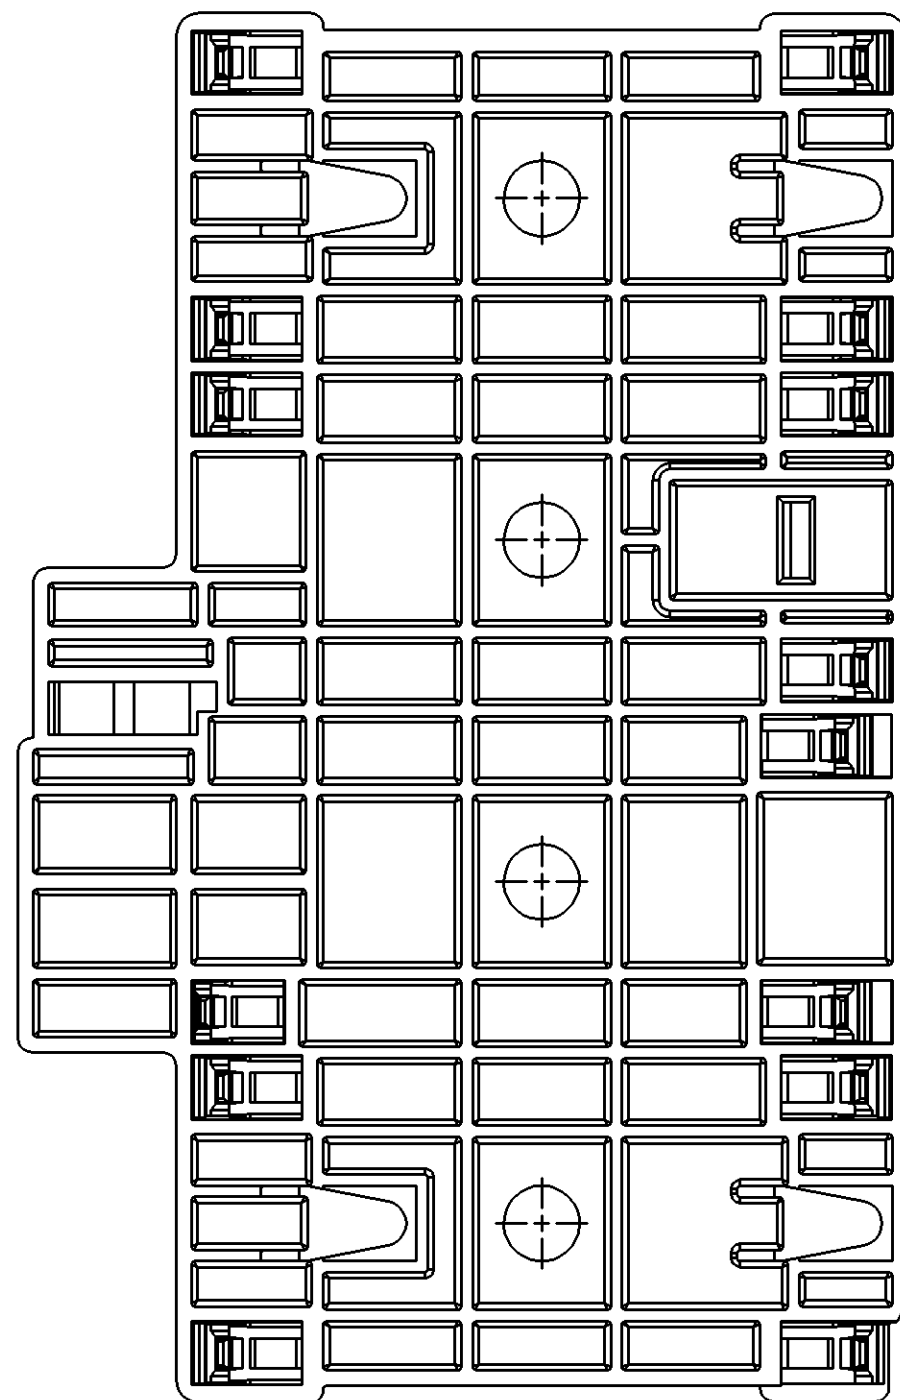
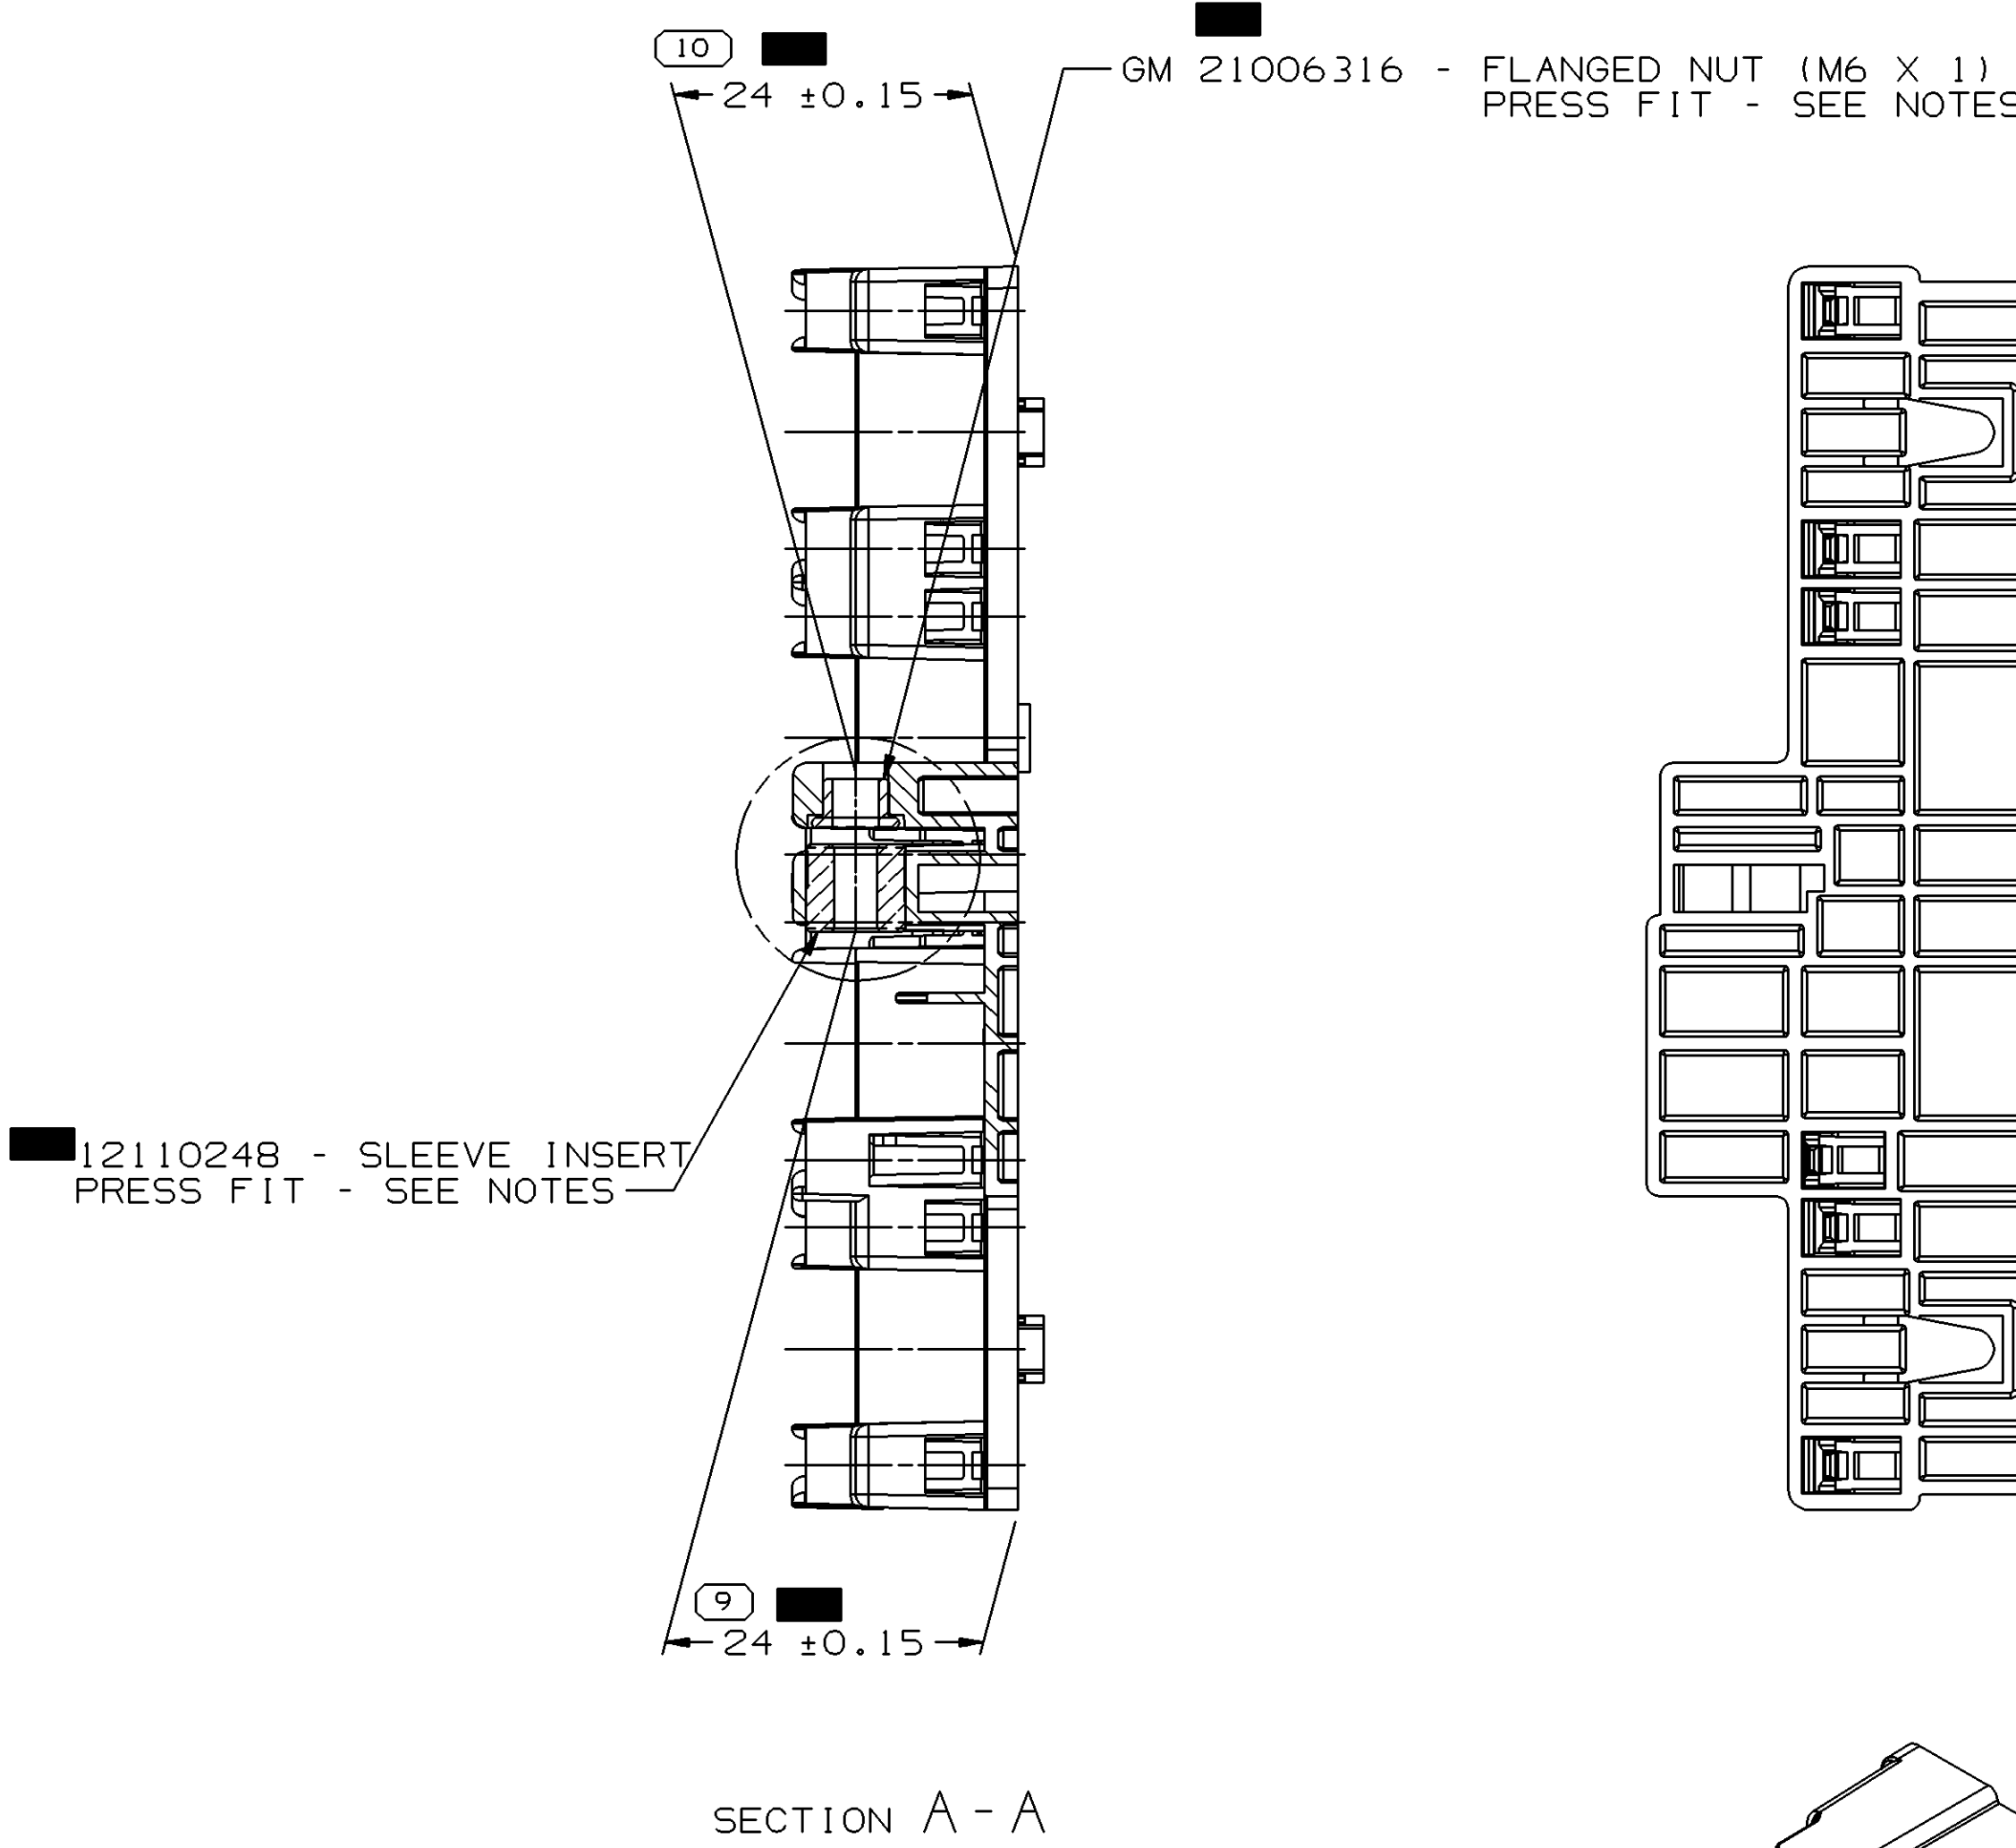
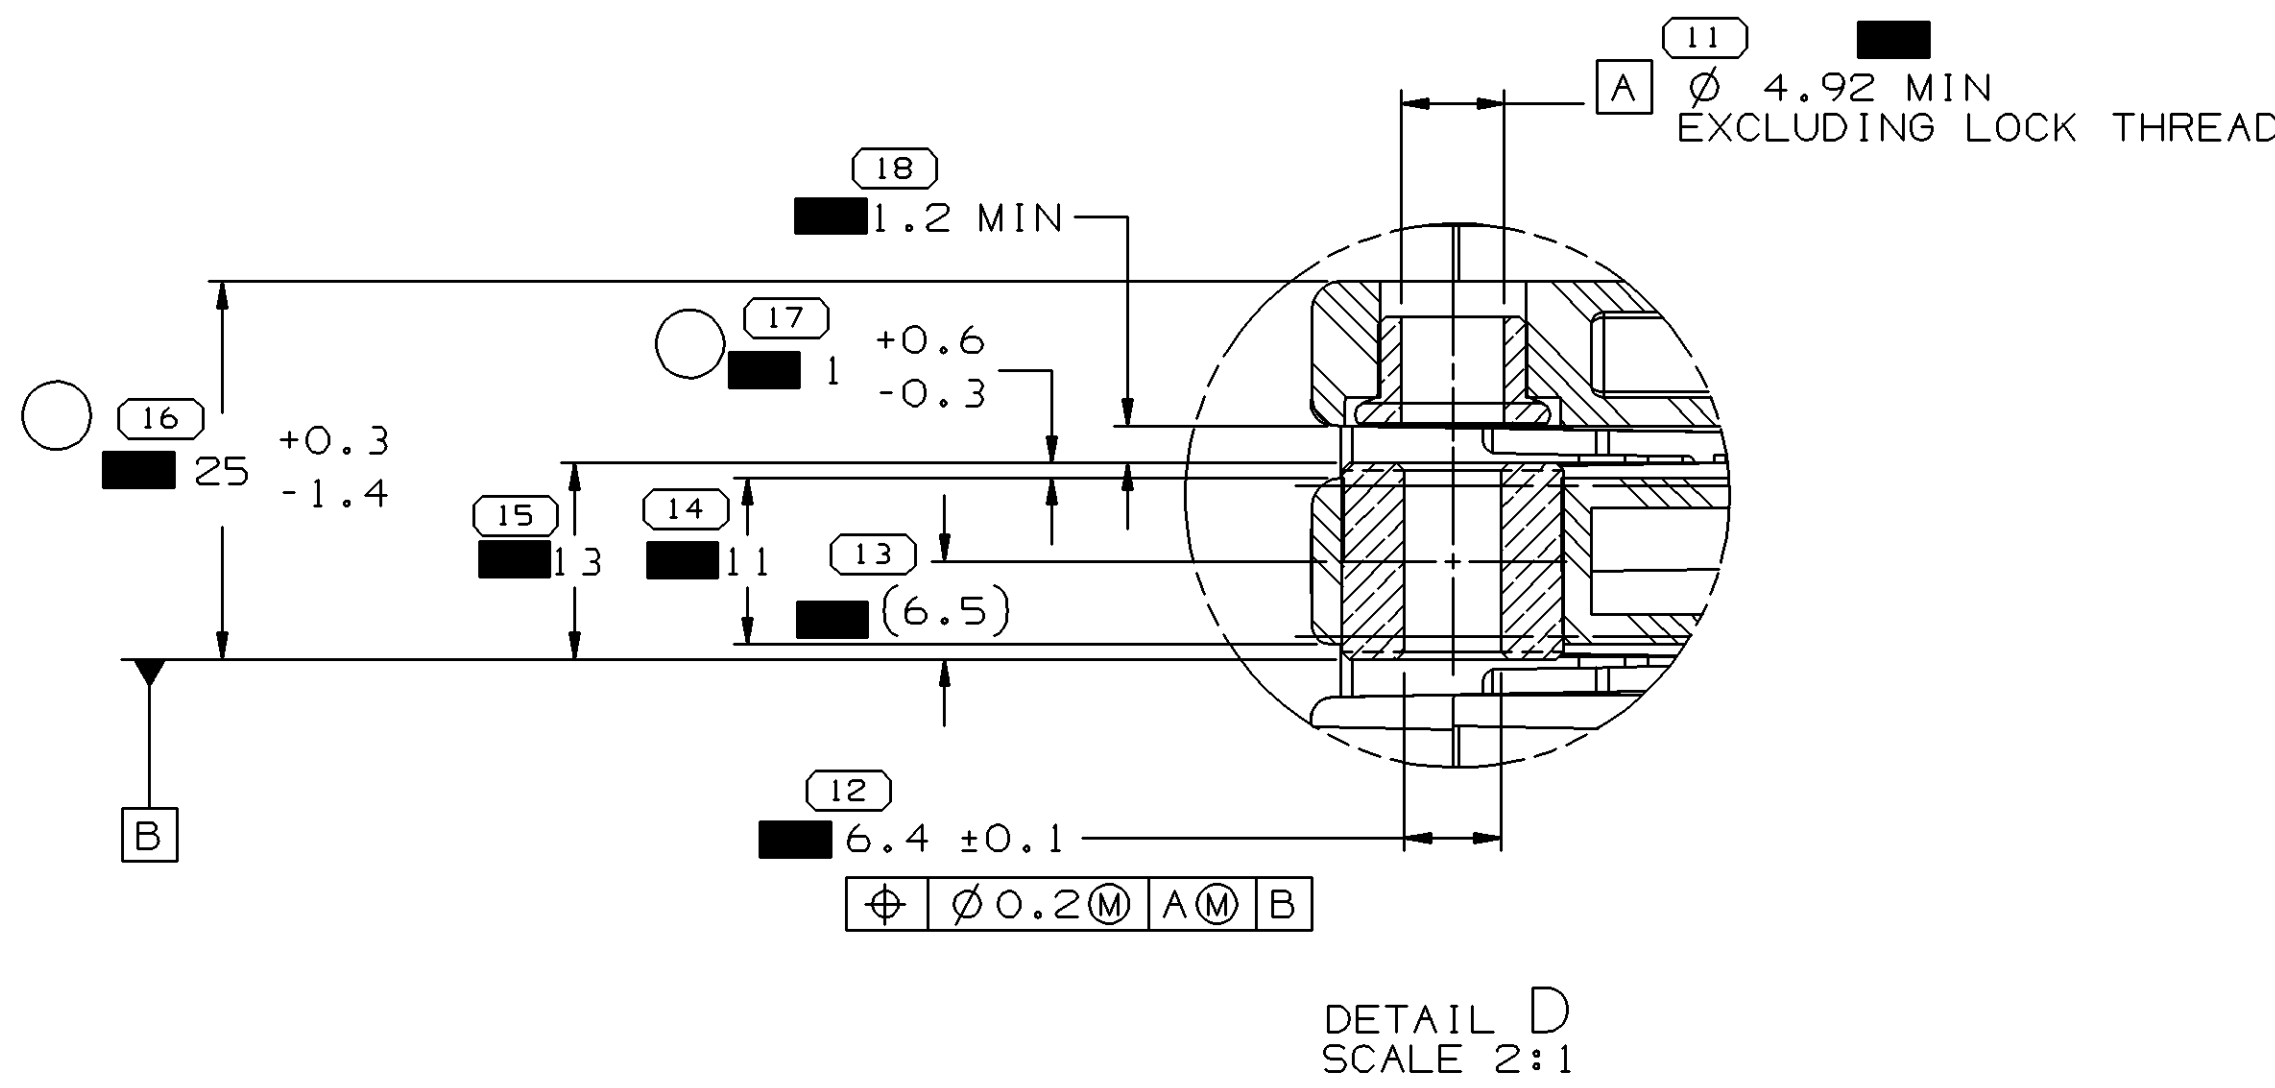
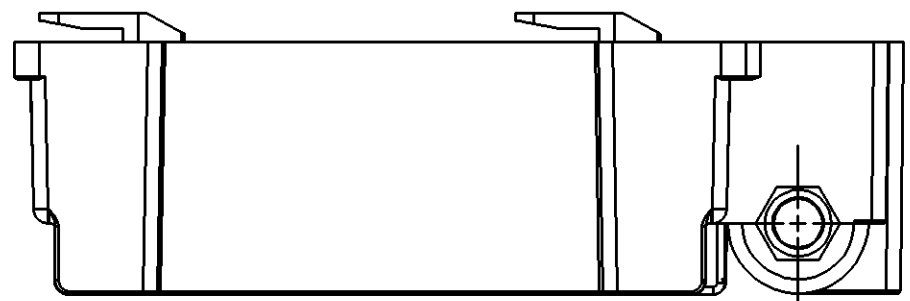


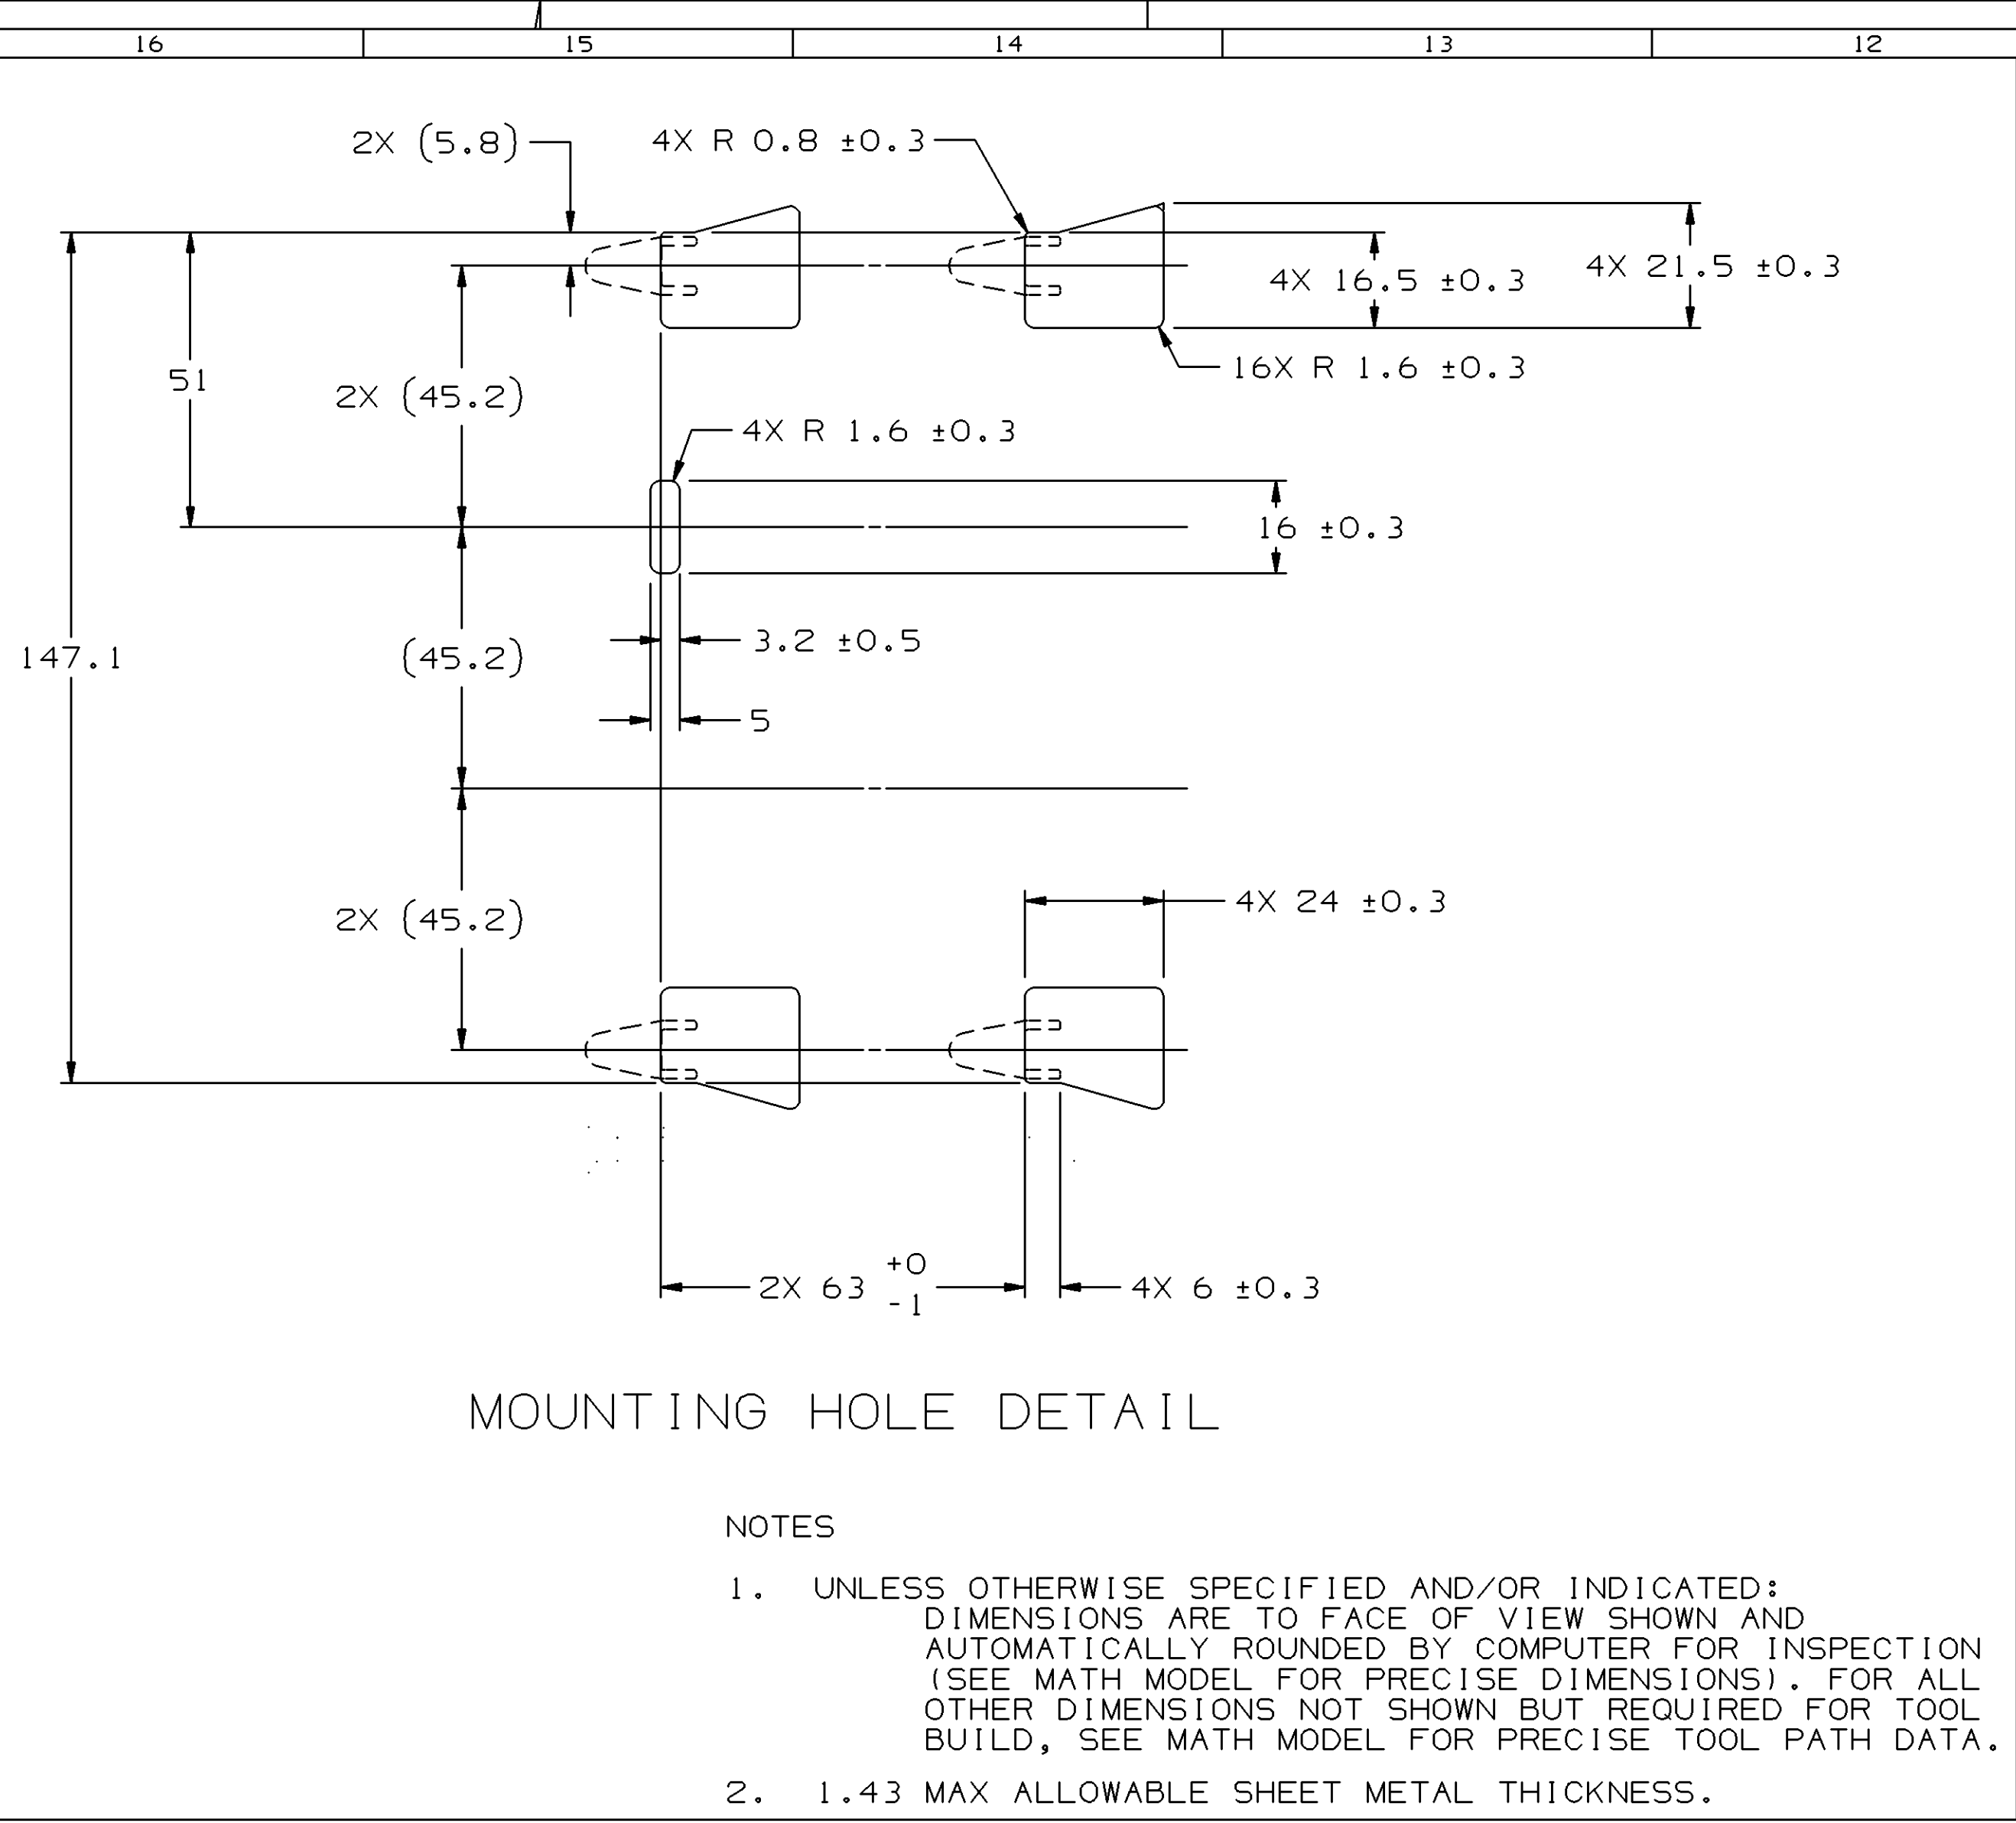

- NOTES
1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
 2. MATERIAL RECYCLING CODE PER ISO 11469. (2.3)X(0.1) RAISED CHARACTERS AS SHOWN TO BE LOCATED ON ANY EXTERIOR SURFACE. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
 3. SEALING CODE 0 - UNSEALED
 4. THIS PART IS NOT CONTROLLED FOR AUTOMATIC FEEDING.
 5. THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT: MODULAR CONVENIENCE CENTER 12129099 MAXI-FUSE FUSEBLOCK ASSEMBLIES M6 BOLT 11515327
 6. NUT MUST WITHSTAND 20NM TORQUE WHEN PULLED OUT TO 1 CLEARANCE FROM SLEEVE INSERT.
 7. SLEEVE MUST WITHSTAND 120N PUSH OUT FORCE MINIMUM.
 8. NUT MUST WITHSTAND 60N PUSH OUT FORCE MINIMUM.
 9. ASSEMBLE BOLT TO INSERT USING B ±3NM OF TORQUE
 10. (2.3)X(0.1) RAISED DELPHI CORPORATE BRAND TO BE LOCATED ON ANY EXTERIOR SURFACE, PREFERABLY VISIBLE AT FINAL ASSEMBLY. OPTIONAL CONSTRUCTION TO BE "PED" OR NO LOGO.
 11. WHEN ONLY ONE MAXI-FUSE MODULE IS USED, IT MUST BE LOCATED IN POSITION 3.
 12. PLUG DEVICES INTO CONVENIENCE CENTERS BEFORE LOCKING CONVENIENCE CENTERS INTO THE BASE
 13. DIMENSIONS NOT INDICATED BY " " DOES NOT REQUIRE INSPECTION AND ARE FOR REFERENCE ON THIS DRAWING. THESE DIMENSIONS MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING

DIMENSIONAL RANGE (MM)		CHART - ET	
FROM	TO	FROM	TO
> 0	> 20	> 70	> 100
> 20	> 30	> 100	> 150
> 30	> 40	> 150	> 200
> 40	> 50	> 200	> 250
> 50	> 60	> 250	> 300
> 60	> 70	> 300	> 400
TOLERANCE UNLESS OTHERWISE SPECIFIED		TOLERANCE UNLESS OTHERWISE SPECIFIED	
±0.15	±0.2	±0.3	±0.4
±0.2	±0.3	±0.4	±0.5
±0.3	±0.4	±0.5	±0.6
±0.4	±0.5	±0.6	±0.8
±0.5	±0.6	±0.8	±1
±0.6	±0.8	±1	±1.2
ANGULAR TOLERANCE 12°		ANGULAR TOLERANCE 12°	

DELPHI	
DELPHI PACKARD ELECTRIC SYSTEMS WARREN, OH	
DR	DATE
APVD1 TOM NADASKY	30JA92
APVD2 J.P. LITTLEFIELD	27MR92
APVD3 J.P. LITTLEFIELD	27MR92
APVD4	
APVD5	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001	
DRAWING NAME ASM MISC MODULE BLK W184.00 H117.70	
DRAWING NUMBER 12129121	
SIZE A0	SCALE 1:1
FRAME NO 1	SHEET NO 1 OF 1
STG R	REV 03